



Specialty hot insulated cabinets for compartment trays for correctional facilities

390-A Meyer Circle • Corona, CA 92879-1078 • Phone (951) 340-3419 • Fax (951) 340-2716 • www.sammonsequipment.com

These fully insulated hot cabinets are furnished with 1½” fiberglass insulation & fixed (welded) slides and are designed to maintain prepared meals in compartment trays for inmates at desired serving temperature. Outer body, door & top are made of 20 ga. (18 ga. optional) stainless steel. Push handle, 14 ga. s/s reinforced deck, tamper resistant fasteners, heavy duty 12 ga. s/s reinforced correctional hinges and latches are standard. Perimeter bumper is also standard for double & triple door cabinets (optional for single door cabinet). Heating units used 1600W or 2000W heating coils depending upon the model selected, 75W blower (2 blowers for top mounted heating unit), thermostat, pilot lights, off-on switch, 8 foot long cord & 3 prong Nema grounding plugs. Thermometer is standard on all models.




Hot insulated cabinet with top mounted heating unit for compartment trays

- Fully insulated cabinet.
- 5” casters (6” for 2 & 3 doors cabinets)
- Top mounted 1600W heating unit HET-1600 with 15 amps cord & NEMA 5-plug for single door & 2000W heating unit HET-2000 20 amps cord & NEMA 5-20P plug for double & triple door cabinets.

Model Number	Tray Size (Inches)	No. of Doors	Tray Spacing (inches)	Capacity	O.A. Dimensions (Inches) D x W x H	Weight (Pounds)
2286-HIN-2-810-78	8½ x 10 x 1¼	1	3	78	36¾ x 29½ x 62½	430
2286-HIN-2-810-90	8½ x 10 x 1¼	1	3	90	36¾ x 29½ x 70½	490
2286-HIN-1015-26	10¾ x 15 x 1⅜	1	3	26	36¾ x 26¼ x 62½	410
2286-HIN-1015-30	10¾ x 15 x 1⅜	1	3	30	36¾ x 26¼ x 70½	475
2286-2-HIN-1014-40	10½ x 14 x 1¼	2	3	40	31½ x 48½ x 54	420
2286-2-HIN-1014-60	10½ x 14 x 1¼	2	3	60	31½ x 48½ x 69	460
2286-3-HIN-1014-90	10½ x 14 x 1¼	3	3	90	31½ x 69½ x 69	540

NOTE: Correctional package is available. Cabinets are also available for other tray sizes. Consult factory.

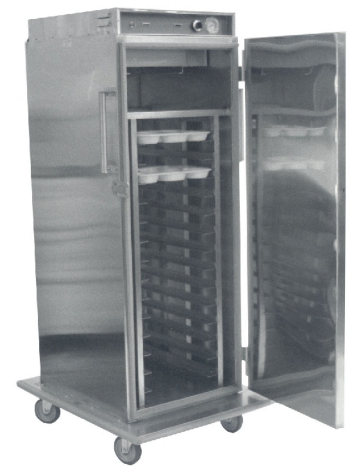

2286-HIN-1015-30 (with optional package)

Dual cavity hot/ambient insulated cabinet for compartment trays

- Left section ambient
- Bottom mounted 2000W heating unit for 20 amps service. (15 amps with 1600W heating optional).
- Right section heated
- Fully insulated & roll on 6”x2” casters

Model Number	Tray Size (Inches)	Tray Spacing (Inches)	Tray Capacity		O.A. Dimensions (Inches) D x W x H	Weight (Pounds)
			Hot	Ambient		
2285-HIN-1-1-2828-1015	10¾ x 15 x 1⅜	3	28	28	31½ x 48½ x 64⅞	370
2285-HIN-1-1-2020-1015	10¾ x 15 x 1⅜	3	20	20	31½ x 48½ x 52¼	320
2285-HIN-2-2-5656-910	9 x 10½ x 2½	3	56	56	31½ x 66 x 64⅞	495
2285-HIN-2-2-4040-910	9 x 10½ x 2½	3	40	40	31½ x 66 x 52⅞	420
2285-HIN-2-2-4848-910	9 x 10½ x 2½	3	48	48	31½ x 66 x 58⅞	496
2285-HIN-2-2-8484-0608	6⅝x8⅝x2½	3	84	84	31½ x 57¼ x 64⅞	550
2285-HIN-2-2-7272-0608	6⅝x8⅝x2½	3	72	72	31½ x 57¼ x 58⅞	510
2285-HIN-2-2-6060-0608	6⅝x8⅝x2½	3	60	60	31½ x 57¼ x 52⅞	475

Options

A. Cold cartridge for ambient section

Options

B. Both sides heated with separate 1600W heating units (consult factory).

ADDITIONAL CORRECTIONAL PACKAGE (OPTIONAL)

1. Non-removable heating unit (in lieu of removable)
2. Heavy duty side/top mounted security lockable latch
3. 18 ga. s/s exterior
4. 6” balloon casters (in lieu of std 6”)
5. Extra set of hinges (3 sets in lieu of 2 sets) for each door
6. Wrap around bumper for single door cabinets



2285-HIN-1-1-2828-1015 (with options)

Better food service equipment – standard models and custom designs.

C-18