



Deluxe heater/proofer combination cabinets insulated & non-insulated

Furnished with HPR-2000 heating/proofering unit with 20 amps cord & NEMA 5-20P plug.
Power Requirements: Total 2075 watts on 110-120 volts. 60 hz, Single Phase, A.C.

CATALOG PAGES C-9 & C-10

Aluminum Hot-Proof Non-Insulated Cabinets

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (see note 1)
					W	D	H		
Extruded Side Channels	9254-HP-1834	18 x 26	1½	34	22	30⅞	69⅞	170	\$3,389
	9254-HP-1826	18 x 26	1½	26	22	30⅞	57⅞	162	3,581
	9254-HP-1818	18 x 26	1½	18	22	30⅞	45⅞	150	3,558
Corrugated Sides	9274-HP-1834	18 x 26	1½	34	22	30⅞	69⅞	168	3,767
Angle Ledge	9284-HP-1817	18 x 26	3	17	22	30⅞	69⅞	164	3,669
	9284-HP-1434	14 x 18	3	34	22	32⅞	69⅞	168	3,917



9254-HP-1834


Stainless Steel Hot/Proof Non-Insulated Cabinets

Type of Slide	Model Number	Pan Spacing (Inches)	Pan Size (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)	List Price (see note 1)
					W	D	H		
Corrugated	2274-HP-1834	1½	18 x 26	34	22	30⅞	69⅞	265	\$5,600
Channel	2254-HP-1834	1½	18 x 26	34	22	30⅞	69⅞	268	5,765
Angle Ledge	2284-HP-1817	3	18 x 26	17	22	30⅞	69⅞	240	5,676
	2284-HP-1434	3	14 x 18	34	22	32⅞	69⅞	290	5,969

NOTE 1: These non-insulated hot/proofer cabinets are provided with LEXAN® doors as standard. Solid doors are available at no charge. Angle ledge cabinets are also available in different heights & spacings. Consult factory. For options, see Table CC-1

Aluminum Hot-Proof Insulated Cabinets (with removable rack)

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
					W	D	H		
Extruded Side Channels	*9253-HP-IN-DD-1834	18 x 26	1½	34	27	36⅞	72½	265	\$4,869
	9253-HP-IN-1826	18 x 26	1½	26	27	36⅞	60	237	4,585
Angle Ledge	*9283-HP-IN-DD-1817	18 x 26	3	17	27	36⅞	72½	255	5,043
	9283-HP-IN-1813	18 x 26	3	13	27	36⅞	60	230	4,771
	*9283-HP-IN-DD-1434	14 x 18	3	34	27	36⅞	72½	255	5,579
	9283-HP-IN-1426	14 x 18	3	26	27	36⅞	60	230	5,073

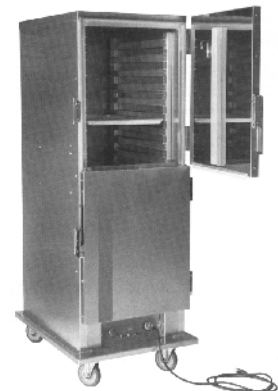

9253-HP-IN-DD-1834

Stainless Steel Hot/Proof Insulated Cabinets (with removable rack)

Type	Model Number	Pan Size (Inches)	Pan Spacing (Inches)	Pan Capacity	O.A. Dimensions (Inches)			Weight (Pounds)	List Price
					W	D	H		
Channel Slides	*2253-HP-IN-DD-1834	18 x 26	1½	34	27	36⅞	72½	378	\$7,487
	2253-HP-IN-1826	18 x 26	1½	26	27	36⅞	60½	360	6,782
Angle Ledge	*2283-HP-IN-DD-1817	18 x 26	3	17	27	36⅞	72½	380	7,612
	2283-HP-IN-1813	18 x 26	3	13	27	36⅞	60½	362	6,906

*Dutch doors are standard on these 72½" high insulated cabinets.

NOTE 2: Insulated cabinets are provided with solid insulated doors. Optional LEXAN® doors are available. See Table CC-1 for this & other options.



**TABLE CC-1
OPTIONS FOR PROOFER & HOT CABINETS**

	LIST PRICE FOR	
	ALUMINUM MODELS	STAINLESS STEEL MODEL
1. Corner bumpers (set of 4)	\$149	\$164
2. Vertical leg bumpers (set of 4)	175	193
3. Wheel brakes (pair) for 5" or 6" casters	61	61
4. Wrap around bumper (single section cabinet)	269	305
5. Wrap around bumper (double section cabinet)	337	402
6. Floor lock (5")	188	249
7. Floor lock (6")	215	280
8. Floor lock (8")	292	355
9. Extra pair of universal angle slides	101	167
10. <u>CASTERS UPGRADE (IN LIEU OF 5" STANDARD, SET OF 4)</u>		
A. 5" Polyurethane	119	119
B. 5" Balloon (decorative)	149	149
C. 6" Polyurethane (1,200# capacity)	184	184
D. 6" Heavy duty polyurethane (2,000# capacity)	280	280
E. 5" Hi-Temp	221	221
F. 6" Balloon	326	326
G. 8" Polyurethane	315	315
H. Stationary legs	280	280
11. <u>CASTERS UPGRADE (IN LIEU OF 6" STANDARD, SET OF 4)</u>		
A. 6" Balloon	236	236
B. 8" Balloon	390	390
C. 8" Polyurethane	249	249
12. Swing door catch (for each door)	106	125
13. Door tag holder (for each door)	61	96
14. Lockable latch (for each door)	127	149
15. Top mounted latch (for each door)	244	299
16. Push handle (each)	167	215
17. Push handle (each) with 2 donut bumpers	215	272
18. Solid dutch doors (non-insulated) in lieu of single solid door	270	352
19. Solid dutch doors (insulated) in lieu of single solid door	342	559
20. Single LEXAN [®] door in lieu of single solid door	384	471
21. Dutch LEXAN [®] doors in lieu of single solid door	706	844
22. Dutch LEXAN [®] doors in lieu of single LEXAN [®] door	279	355
23. *Single pass thru' door in the rear	546	697
24. *Dutch pass thru' doors in the rear	683	1,222
25. 220v/240v application (in lieu of 120v)	348	348
26. Canadian application (in lieu of U.S.)	229	229
27. 17 hour timer (in lieu of 10 hour)	145	145
28. HE-2000 (2,000w heating, 20 amps service unit) in lieu of HE-1600 (1,600w heating, 15 amps service unit)	184	184
29. Bail handles/pair/ side	145	201
30. Drain hole/section	132	132
31. Export crating	566	566

*FOR HOT INSULATED CABINETS WITH TOP MOUNTED HEATING UNITS ONLY.

NOTE: Most aluminum hot, proof & hot/proof cabinets are also available in s/s construction. Add 65% to list prices of aluminum models unless listed otherwise based on a minimum quantity of 5 units & an up charge of 20% to 80% may apply for quantities under 5. Consult factory.